MULTIQUIP

Globug Lighting Systems William








stabilization




GBC — Cart Type

The ideal combination of GloBug, generator, and heavy duty cart — GBC Series

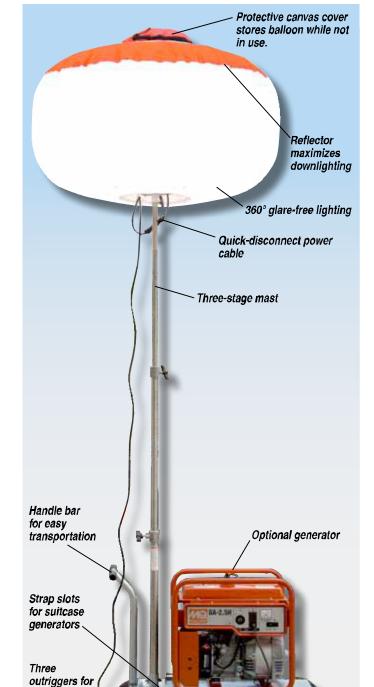

- Steerable cart design for easy transportation sets up without tools; easy to maneuver.
- Metal Halide lamp single 1,000 watt lamp for maximum illumination. Pure white light 3400° K.
- 360° glarefree illumination with standard balloon.
- Quick restrike time 3 to 5 minutes.
- Universally adaptable to all AC power supplies accepts 50/60Hz, 100-240V.
- **Downward direct illumination** with reflector balloon.
- Self-inflating balloons are easy to install and inflate in less than 20 seconds.
- Three-stage mast extends up to 12' 1".
- Three outriggers for great stabilization.
- System can be broken down and placed in the trunk of a car
- Light coverage up to 150 feet.

Illumination Range



Footcandles	Feet
	BAL115D
10	27
5	36
2	57
1	82
0.5	110
0.25	168

Specifications

Large pneumatic tires for easy

maneuverability

Parking brake

Model	GBC
Voltage (V)	100-240V
Amps (A)	9.3 @ 120V
Hz	50-60
Lamp Type	1,000 watt Metal Halide (x1)
Total Luminous Flux (Im)	107,000
Standard Balloon Diameter in. (mm)	47.2 (1200)
Outriggers	3
Mast — Number of stages	3 Stages (Air Shock Absorbers)
Upper Position Working Dimensions LxWxH in. (mm)	51.2 x 52.2 x 94.5 to 145.7 (1,300 x 1,325 x 2,400 to 3,700)
Storage Dimensions LxWxH in. (mm)	27.6 x 40 x 47.7 (700 x 1,023 x 1,212)
Balloon Dimensions LxWxH in. (mm)	47.2 x 47.2 x 28.3 (1200 x 1200 x 720)
Weight lb. (kg)	126 (57.2)
Appropriate Generator	170 0 Watts